


# *Quincy*




**COMPRESSORS**

**THE MOST COMPLETE LINE**



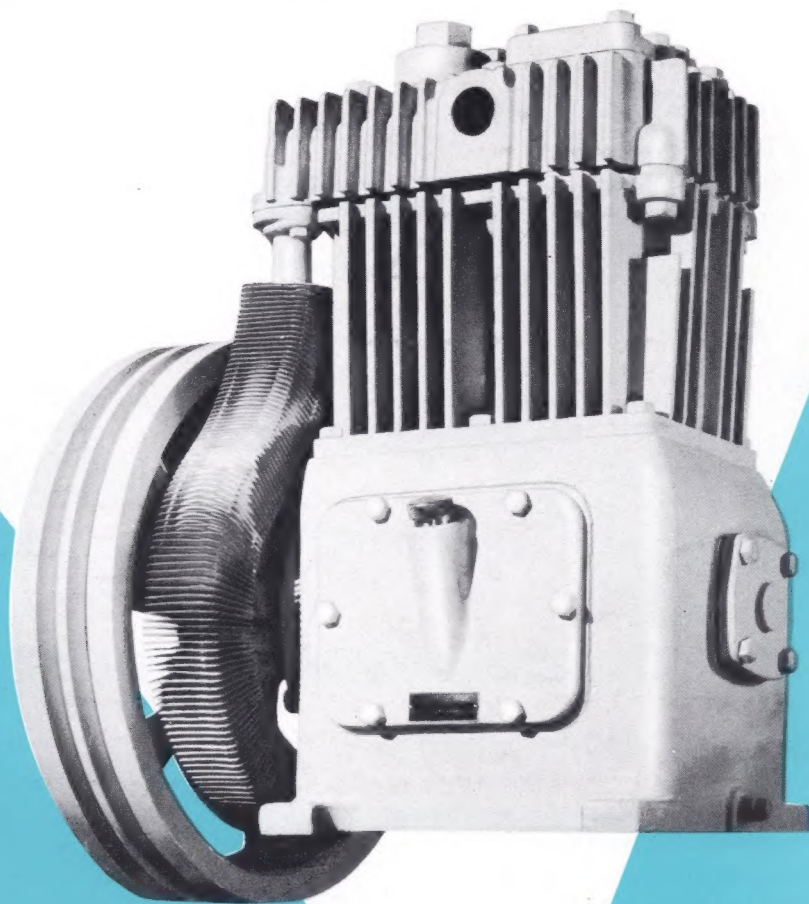

## TANK MOUNTED UNITS

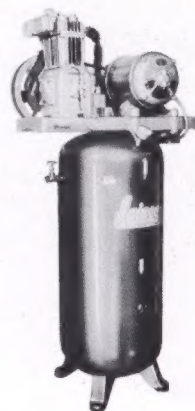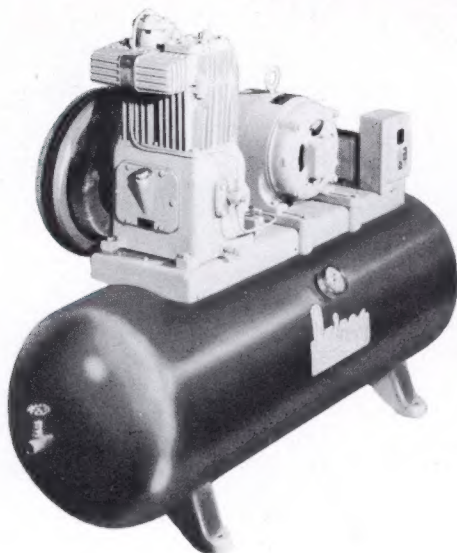

### SINGLE STAGE HORIZONTAL MODELS

Models FX-2, FA-4, F-106, F-108. Standard pressure setting 120-150 p.s.i. FX-8 standard pressure setting 60-80 p.s.i.

Models F-212, F-216, F-230, F-240, F-244, F-255, with Safe-Q-Lube pressure lubrication, standard pressure setting 80-100 p.s.i. Piston Displacement 1.8 to 55 C. F. M. All horizontal models available with constant speed unloader are designated as H models. Portable mountings are available.

### SINGLE STAGE VERTICAL SPACE SAVERS

Models VA-4, VX-8, V-106, V-108 are single stage compressors. Standard pressure setting, Model VX-8, 60-80 p.s.i., Models VA-4, V-106, V-108, 120-150 p.s.i.

### TWO STAGE HORIZONTAL MODELS


Models F-308, F-310, F-312, F-325, automatic units with Safe-Q-Lube pressure lubrication by means of rotary pump. Standard pressure setting, 140-175 p.s.i. Special pressure settings available. Piston displacement 5.7 to 25.0 C. F. M.

Models F-340, F-350, F-390, DF-390, automatic units with Safe-Q-Lube pressure lubrication by means of piston type oil pump. Standard pressure setting, 140-175 p.s.i. Special pressure settings available. Piston displacement 36.0 to 92.0 C. F. M.


### TWO STAGE VERTICAL TANK MODELS

Models V-308, V-310, V-312, V-325 are vertical two-stage automatic units. Standard pressure setting, 140-175 p.s.i. Special pressure settings available. Piston displacement 5.7 to 25.0 C. F. M.

## PORTABLE COMPRESSORS

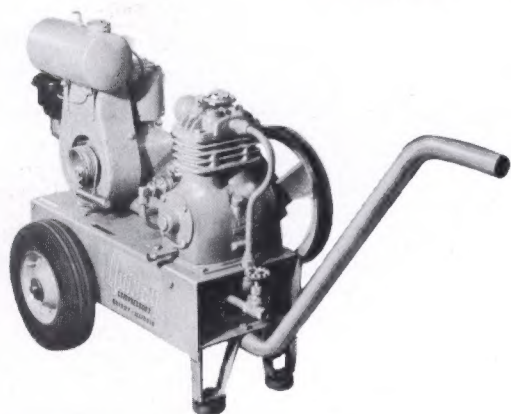

Model TX-8. Single stage, duplex cylinder compressor. Maximum piston displacement, 8.6 C. F. M. Standard pressure setting 70-80 p.s.i.

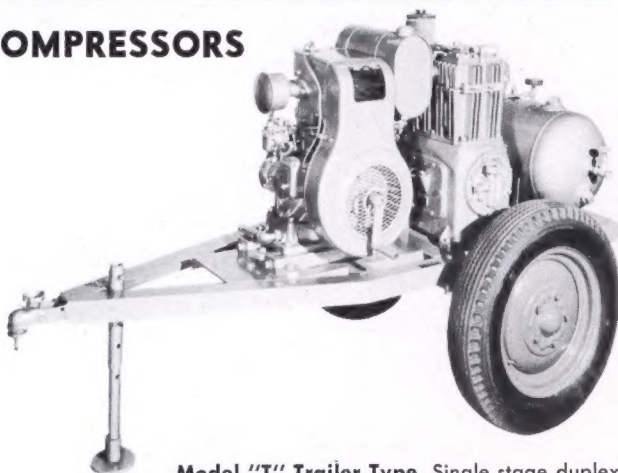

Model "T" Trailer Type. Single stage duplex cylinder compressors ranging from 18.0 to 58.0 C. F. M. Standard pressure setting 70-80 p.s.i. Two stage compressor units ranging from 9.5 to 48.0 C. F. M. Standard pressure setting 160-175 p.s.i.


**NATION-WIDE  
AUTHORIZED SERVICE**




To assure greater satisfaction to Quincy Compressor users, careful attention has been devoted to setting up Authorized Service Depots on a nation-wide basis. Adequate stocks of genuine parts for the wide range of sizes and types of compressors manufactured by Quincy Compressor Co. are maintained at these depots. Quincy users, whether in their own plant, or as a part of a product, are assured of prompt, dependable service.

**SERVICE FROM COAST TO COAST**




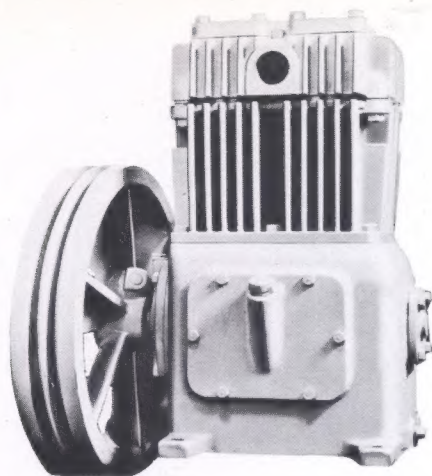

**Single Stage  
Duplex Cylinder.**



**Model X-2.**



**Model X-8.**


## SINGLE STAGE AIR-COOLED COMPRESSORS

**Single Stage Single Cylinder.** Models A-4, 106, 108. Maximum continuous pressure, 100 p.s.i. Piston displacement 3.4 to 9.0 C. F. M.

**Single Stage Duplex Cylinder.** Models 212, 216, 230, 240, 244, 255. Piston displacement, 9.8 to 55 C. F. M. Maximum continuous pressure, 100 p.s.i.

**Model X-2.** Single cylinder. Maximum continuous pressure, 100 p.s.i. Piston displacement, 1.2 to 2.8 C. F. M.


**Model X-8.** Duplex cylinder. Maximum continuous pressure, 80 p.s.i. Piston displacement 4.3 to 9.3 C. F. M. Both Models X-2 and X-8 are small, compact, lightweight compressors.

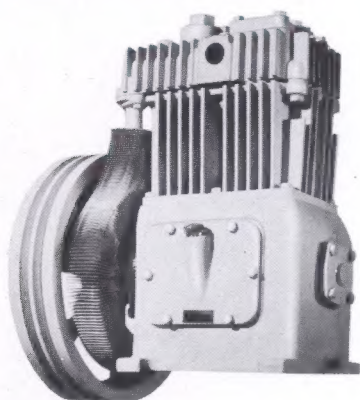

## TWO STAGE AIR-COOLED COMPRESSORS


**Models 308, 310, 325.** (Pressure lubricated—rotary pump.) Maximum continuous pressure, 200 p.s.i. Maximum intermittent pressure, 500 p.s.i. Piston displacement, 4.6 to 25.0 C. F. M.

**Models 330, 340, 350, 390.** (Pressure lubricated—positive displacement pump.) Maximum continuous pressure, 200 p.s.i. Maximum intermittent pressure, Models 330, 340, 500 p.s.i., Model 350, 350 p.s.i., Model 390, 250 p.s.i. Piston displacement 24.3 to 92.0 C. F. M.

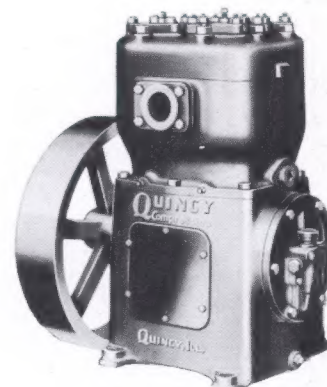

## SINGLE STAGE WATER-COOLED COMPRESSORS

**Models WW-33, WW-44, WW-64, WW-80.** Duplex cylinder water-cooled compressors, maximum continuous pressure 100 p.s.i. Piston displacement 30 to 80 C. F. M. All models pressure lubricated. Base mounted units also available (Models WWD-33, WWD-44, WWD-64, WWD-80). Automatic units, including separate vertical air receivers (Models WWC-33, WWC-44, WWC-64, WWC-80).

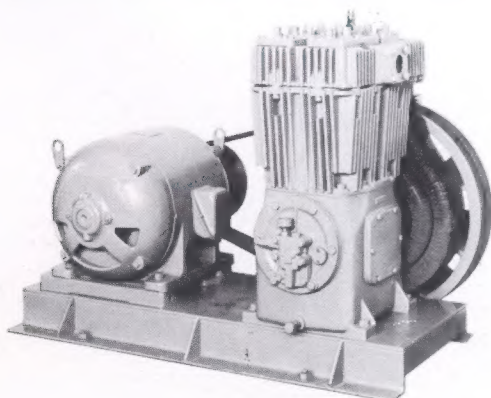

## BASE MOUNTED COMPRESSOR UNITS

**All Quincy Compressors** available mounted on substantial steel base, V-belt driven by gasoline engine or electric motor.

**Single Stage Models:** DX-2, DX-8, DA-4, D-106, D-108, D-212, D-216, D-230, D-240, D-244, D-255. Piston displacement, 2 to 55 C. F. M.

**Two Stage Models:** D-308, D-310, D-325, D-330, D-340, D-350, D-390. Piston displacement, 4.6 to 92.0 C. F. M.



STANDARD


**Quincy**  
COMPRESSORS

FEATURES

SAFE-Q-LUBE PRESSURE LUBRICATION

ONLY QUINCY  
OFFERS ALL THESE  
ADVANTAGES:

- 1-2. Four-ring, light weight automotive-type low and high pressure pistons.
- 3-4. Strong, light weight Lynite connecting rods.
5. Balanced crankshaft with integral counterweights.
6. Oil inlet screen.
7. Drive shaft for new rotary vane-type oil pump.
8. Four-vane oil pump.
9. Self-reversing pump valve.
10. Oversize Timkin roller bearings.
11. Easy-reading oil gauge.
12. Intake oil passage in bearing carrier and crankcase.

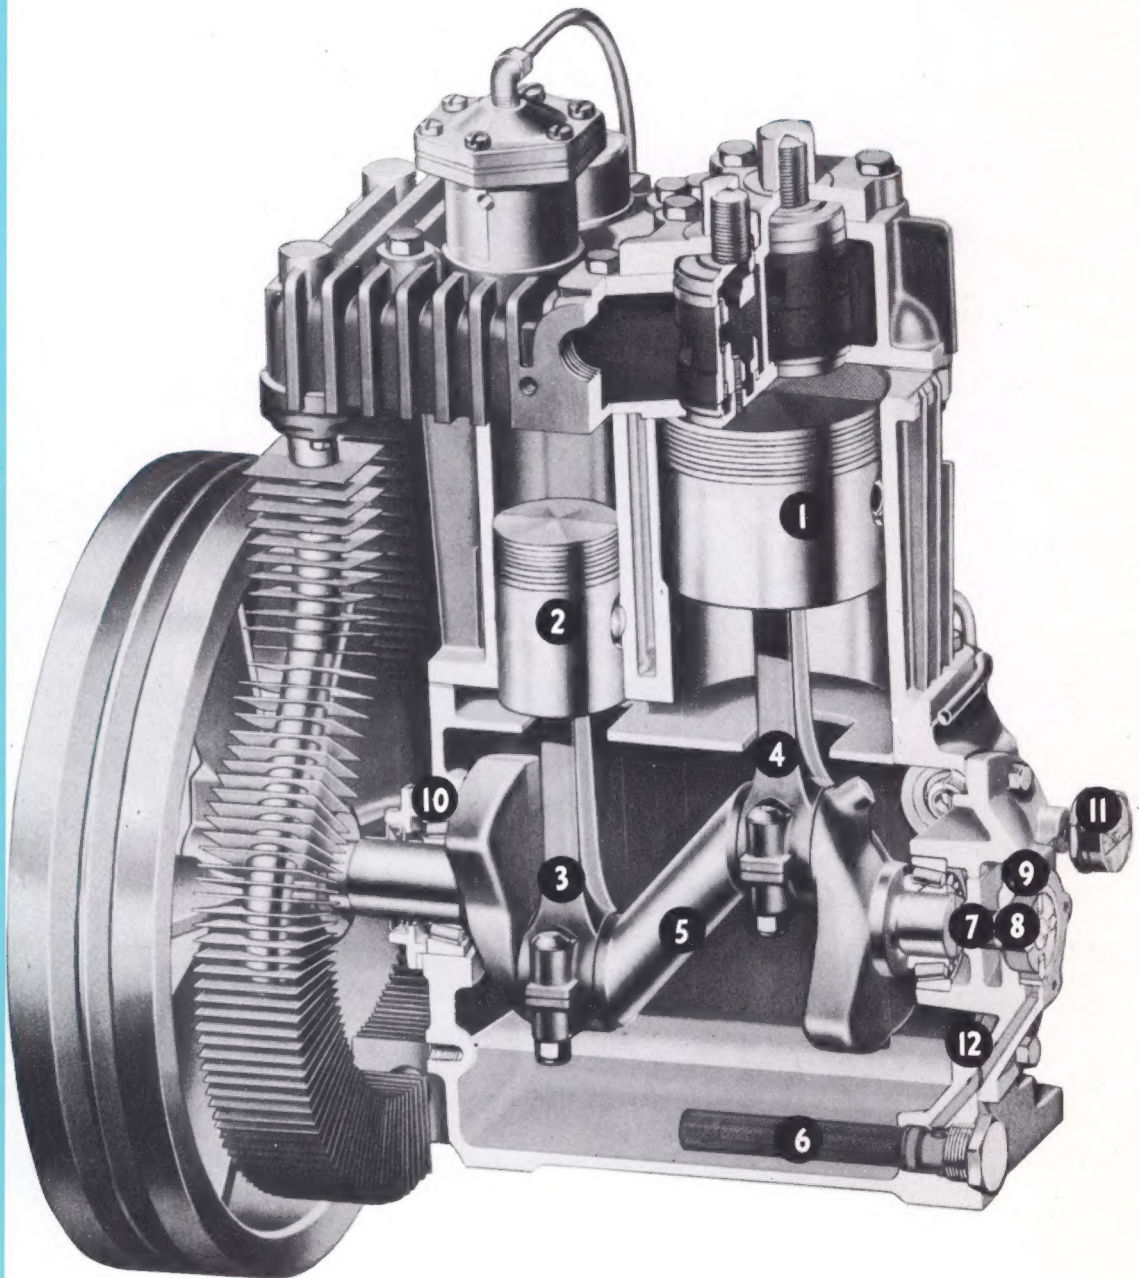

**QUINCY COMPRESSOR CO.**

QUINCY, ILLINOIS

Sales Offices: Atlanta • Charlotte • Chicago • Cincinnati • Dallas  
Detroit • Houston • Minneapolis • New York  
Philadelphia • St. Louis • San Francisco